

Plug-in sockets and accessories

GZP80

For RM84, RM85, RM85 inrush, RM85 105 °C sensitive, RM87L, RM87L sensitive, RM87P, RM87P sensitive, RMP84, RMP85

Push-in terminals
Max. cross section of the cables:
2 x 1,5 mm² (ferrules without isolation)
2 x 1 mm² (ferrules with isolation)
Stripping length: 8...10 mm

35 mm rail mount
acc. to EN 60715
or on panel mounting
97 x 15,9 x 45,9(75,8) mm ②
5 mm pinout
One pole
12 A, 300 V AC
Two poles
8 A, 300 V AC



GZP80-0400



GZT80-0040



GZM80-0041




GZ80-1001




Module type M...


Connection diagrams ③

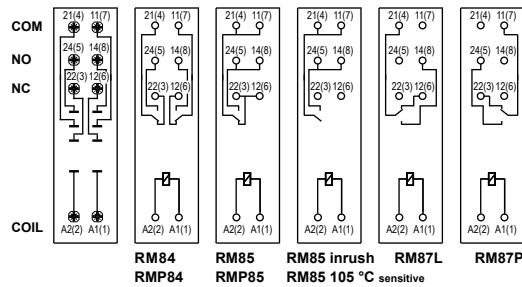

Dimensions

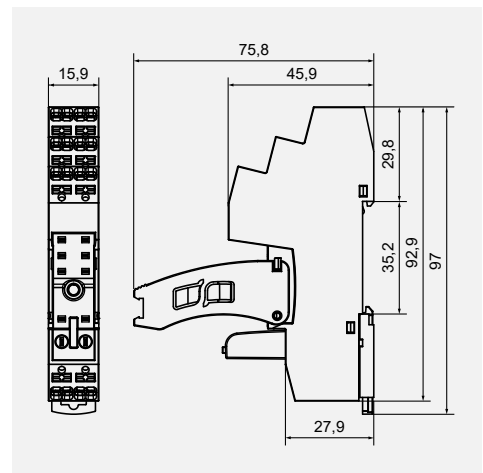

The drawings present inserting wire into the Push-in terminal and removing wire using the button releasing a clamp (assembly without tools).



Accessories ①


Wire connection

GZP4

For R4N, R2N

Push-in terminals
Max. cross section of the cables:
2 x 1,5 mm² (ferrules without isolation)
2 x 1 mm² (ferrules with isolation)
Stripping length: 8...10 mm

35 mm rail mount
acc. to EN 60715
or on panel mounting
97 x 31 x 45,9(75,8) mm ②
Two poles
12 A, 300 V AC
Four poles
8 A, 300 V AC



GZP4-0400



GZT4-0040




G4 1052




Module type M...


Connection diagrams



Dimensions

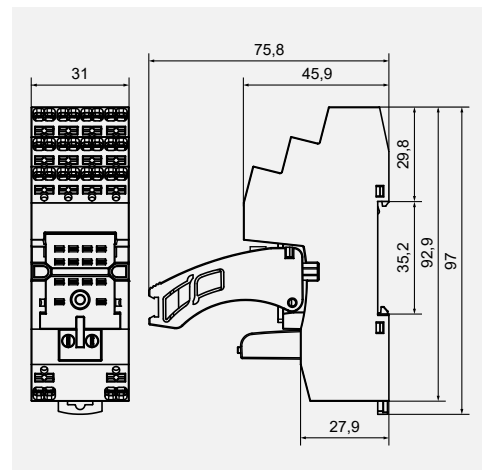

The drawings present inserting wire into the Push-in terminal and removing wire using the button releasing a clamp (assembly without tools).



Accessories ①

Wire connection

① Mounting and sub-assemblies of accessories in the socket; Signalling / protecting modules type M... - see www.repol.com.pl ② In the bracket the height of socket with retainer / retractor clip is shown. ③ For RM85..., RMP85: loads above 12 A require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24 - see www.repol.com.pl

Plug-in sockets and accessories

GZ14P

For R15 - 4 CO

Push-in terminals


Max. cross section of the cables:
 2 x 2,5 mm² (ferrules without isolation)
 2 x 1,5 mm² (ferrules with isolation)
 Stripping length: 10 mm

On panel mounting, behind


92,2 x 46 x 44,7 mm

Four poles


10 A, 250 V AC

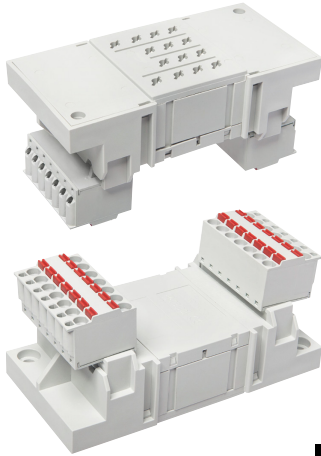

Connection diagram




Mounting dimensions



GZ14 0737

Dimensions

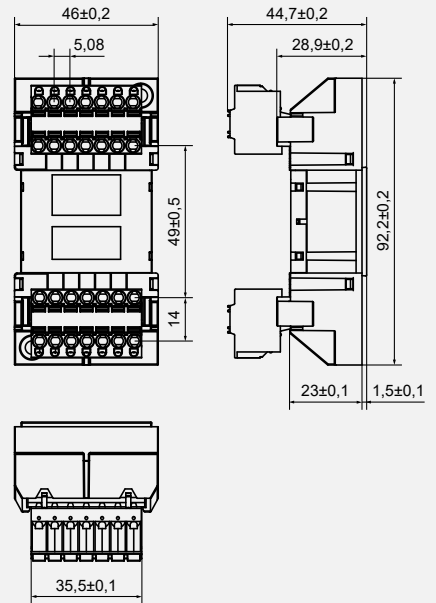

Accessories

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.